


Polymer Flocculation unit PD-1000

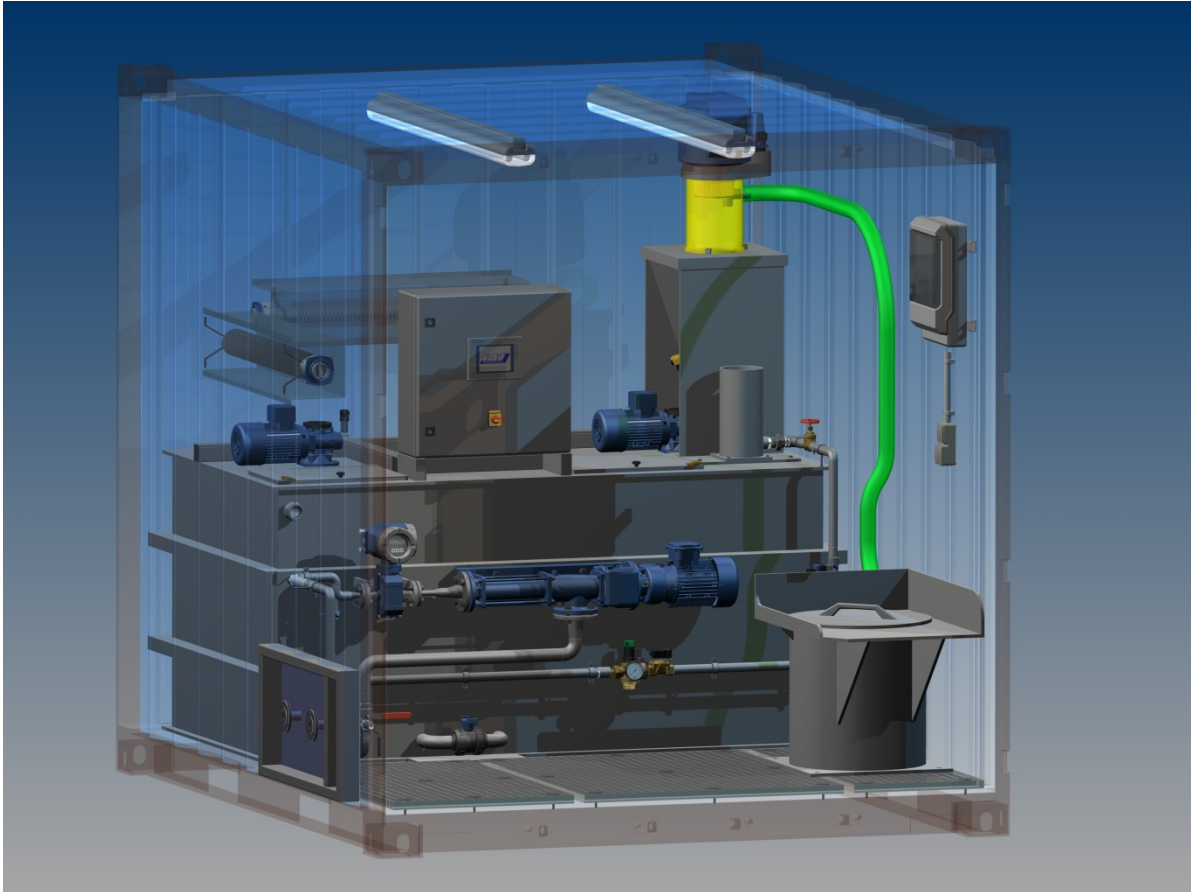

TECHNICAL DESCRIPTION

- 1 nos. 10 ft. Sea Container (3050 x 2430 x 2590 mm) with front double door
- 1 nos. Electric heating
- 2 nos. Lights each 58 Watt
- 1 nos. Switches and sockets 230 V / 50 Hz with fuses
- 1 nos. Main water connection R 1" with outside side connection
- 1 nos. Main power connection 400 V 50/60 Hz. Stecker

- 1 nos. Polymer Unit Type: PD 1000 in PP incl. Powder Min Sensor, 3 nos. Mixers 0,55 KW, all pipes in stainless 1.4301 incl. Panel SPS S7-1200 and operators touch screen panel
- 1 nos. Dosing pump Q= 100 – 1200 l/h at max. 3 bar incl. Frequency inverter.
- 1 nos. Polymersolution MID Fabr. E&H – Type Promag 50 P in DN 15 incl. ancillaries
- 1 nos. Vacuum suction unit for powder polymer
- 1 nos. Bag bucket for powder polymer 100l
- 1 nos. paint in RAL 5010

